

LONGES  
LANYARDS  
ESLINGAS  
CORDINI  
LEINEN





# SKALA

FA 40 909 20  
FA 40 909 40  
FA 40 909 100  
FA 40 909 150  
FA 40 909 250

55 cm openable protection sleeve



EN 358 + EN 795 Type B & C + EN 353-2 + EN 12841 Type A & B

ANTI ABRASION ROPE

ALU FORGED

# VYSKA


FA 40 906 50  
FA 40 906 100

55 cm protection sleeve




EN 358 + EN 795 Type B & C


ALU FORGED

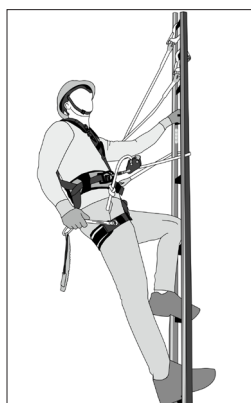

EN 358

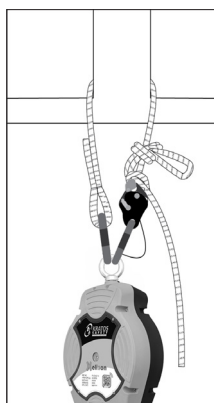

EN 795 Type B

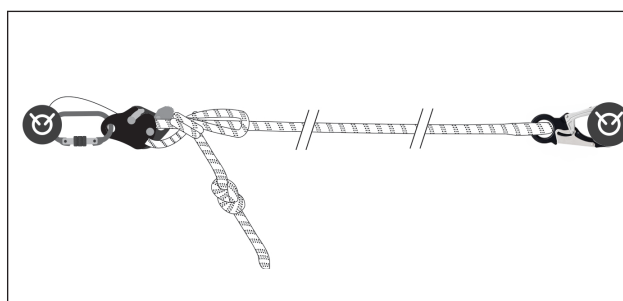

EN 795 Type C

REF.	FA 40 909 20	FA 40 909 40	FA 40 909 100	FA 40 909 150	FA 40 909 250	FA 40 906 50	FA 40 906 100
MAX. LG.	2.0 m	4.0 m	10.0 m	15.0 m	25.0 m	5.0 m	10.0 m
CE	EN 358, EN 795 Type B & C, EN 353-2, EN 12841 Type A & B					EN 358, EN 795 Type B & C	
MAT.	PA 11 mm				PA 12 mm		
	ALU QUARTER / DOUBLE ACTION				ALU QUARTER / DOUBLE ACTION		
MAT.	ALU				ALU		
	0.75 KG	0.77 KG	1.55 KG	2.10 KG	3.05 KG	0.75 KG	1.60 KG


# SILVA 1





FA 40 504 10  
FA 40 504 15  
FA 40 504 20



# SILVA 2

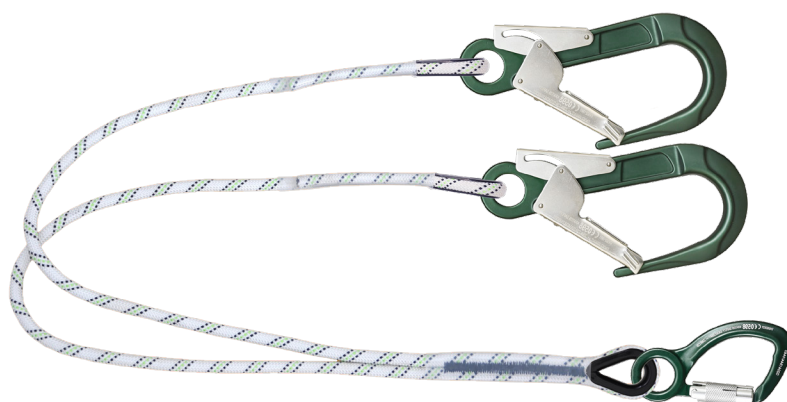FA 40 601 10  
FA 40 601 15



REF.	FA 40 504 10	FA 40 504 15	FA 40 504 20	FA 40 601 10	FA 40 601 15
LG.	1.0 m	1.5 m	2.0 m	1.0 m	1.5 m
CE	EN 354			EN 354	
MAT.	● PA 11 mm			● PA 11 mm	
	 QUARTER / DOUBLE ACTION			 QUARTER / DOUBLE ACTION	
R (kN)	22 kN			22 kN	
	0.74 KG	0.78 KG	0.83 KG	1.29 KG	1.36 KG

# TiWA


FA 40 909 30A  
FA 40 909 50A




EN 358 + EN 795 Type B & C



EN 358

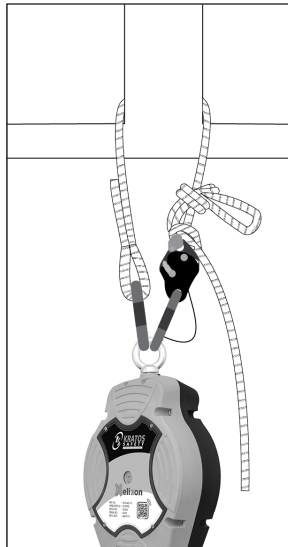

EN 795 Type B

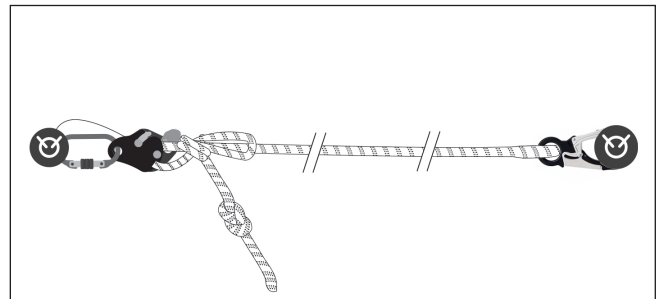


EN 795 Type C

REF.	FA 40 909 30A	FA 40 909 50A
LG.	3.0 m	5.0 m
CE	EN 358, EN 795 Type B & C	
MAT.	PA 11 mm	
	 QUARTER / DOUBLE ACTION	
MAT.		
Kg	0.92 KG	1.10 KG

# ASTRA

FA 40 908 20  
FA 40 908 40

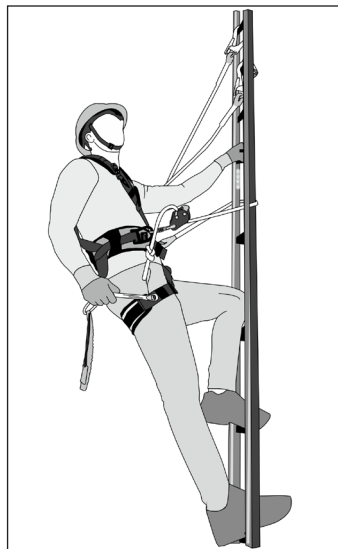

EN 358

REF.	FA 40 908 20	FA 40 908 40
LG.	2.0 m	4.0 m
CE	EN 358	
MAT.	PES 11 mm	
	ALU QUARTER / DOUBLE ACTION	
MAT.	ALU	
kg	0.73 KG	0.93 KG

**FA 40 900 20**



**FA 40 901 20**




REF.	FA 40 900 20	FA 40 901 20
LG. (MIN. / MAX.)	1.2 m / 2.0 m	1.2 m / 2.0 m
CE	EN 358	EN 358
MAT.	PA 14 mm	30 mm PES
MAT.		
	0.81 KG	0.47 KG

**FA 40 902 20**



**FA 40 903 20  
FA 40 903 40**

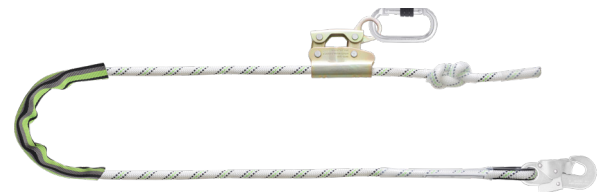

REF.	FA 40 902 20	FA 40 903 20	FA 40 903 40
LG. (MIN. / MAX.)	1.2 m / 2.0 m	0.6 m / 2.0 m	1.5 m / 4.0 m
CE	EN 358	EN 358	
MAT.	PA 11 mm	PA 12 mm	
MAT.			
	0.69 KG	0.99 KG	1.30 KG

FA 40 500 10  
FA 40 500 15  
FA 40 500 20



FA 40 502 10  
FA 40 502 15  
FA 40 502 20




REF.	FA 40 500 10	FA 40 500 15	FA 40 500 20	FA 40 502 10	FA 40 502 15	FA 40 502 20
LG.	1.0 m	1.5 m	1.8 m	1.0 m	1.5 m	1.8 m
CE	EN 354			EN 354		
MAT.	● PA 11 mm			● PA 11 mm		
	---					
R (kN)	22 kN			22 kN		
	0.17 KG	0.20 KG	0.23 KG	0.66 KG	0.69 KG	0.72 KG

FA 40 503 10  
FA 40 503 15  
FA 40 503 20



FA 40 600 10  
FA 40 600 15

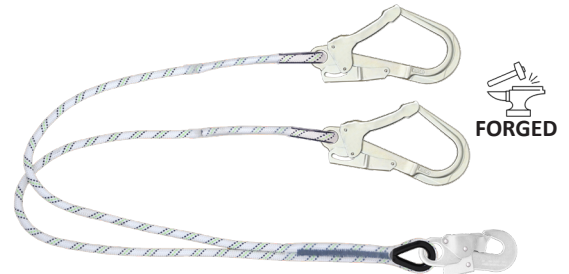

REF.	FA 40 503 10	FA 40 503 15	FA 40 503 20	FA 40 600 10	FA 40 600 15
LG.	1.0 m	1.5 m	2.0 m	1.0 m	1.5 m
CE	EN 354			EN 354	
MAT.	● PA 11 mm			● PA 11 mm	
R (kN)	22 kN			22 kN	
	0.89 KG	0.91 KG	0.93 KG	1.45 KG	1.48 KG